

ROOM TEMP. & HUMIDITY TRANSMITTER

(GSTH-1100)



Application

"GSTH" Room Temperature Humidity Transmitter is intended for ventilation and air-handling units to detect Room temperature and relative humidity.

Especially, this unit is very suitable for using in pulp/textile/food warehouse, greenhouse, computer room, R&D room, indoor swimming pool, hospital, etc.

Equipment Combinations

This unit can be used with all system equipments that can receive output signals 0~10V DC of the detector.

Operating Mode

- Relative humidity
Electronic sensing circuit varies signal into 0~10V DC(Within 0~100% relative humidity)
- Temperature
This Transmitter senses temperature by sensing element of PT 1000Ω which varies electrical resistance depending on sensing temperature

Technical Data


- | | |
|---------------------|----------------------------|
| ● SUPPLY VOLTAGE | : 24V AC/DC ±20% |
| ● FREQUENCY | : 50 or 60Hz |
| ● POWER CONSUMPTION | : below 1VA |
| ● SENSING RANGE | : -10~+70℃ / 0~100%RH |
| ● HUMIDITY ELEMENT | : Integrated Circuit |
| ● ACCURACY(at20℃) | : at 20~90%RH, ±3%RH |
| ● OUTPUT SIGNAL | : Pt1000Ω(Pt100Ω)/0~10 VDC |
| ● SENSING TIME | : Approx, 20sec |

- AMBIENT TEMPERATURE :
 - 1) On Operation: -10~+70℃
 - 2) On Transportation & Storage: -25~+65℃
- AMBIENT HUMIDITY : On Operation : below 95%RH
- PROTECTION CLASS : IP30(EN60529)
- WIRING : 5 and 6 wires, 1.0m²
- WEIGHT : 0.06Kg
- HOUSING : Plastic case

Mounting Notes

- Select a location approx 1.5 meter above the floor.
- The sensor location should also be reasonably dean and free damp and condensation.

Wiring Diagram

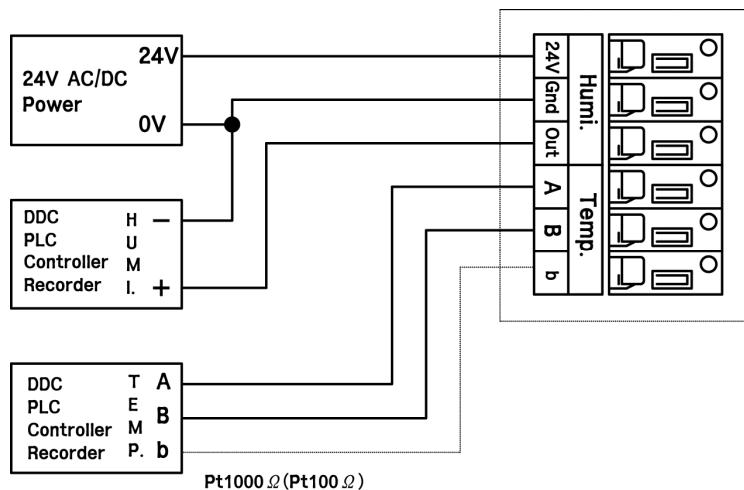

Dimension

